

# Wall-Mounted 208~230V



Job Name: \_\_\_\_\_ Date: \_\_\_\_\_


System Reference No.: \_\_\_\_\_ Engineer Signature: \_\_\_\_\_

## Model: GMV-ND24G/B4B-T(U)



Specifications	Unit	Parameter
<b>Performance</b>		GMV-ND24G/B4B-T(U)
Rated Cooling Capacity	kBtu/h	24.0
Rated Heating Capacity	kBtu/h	25.5
Sound Pressure Level (H/M/L)	dB(A)	44/41/37
<b>Electrical Data</b>		
Power supply	Voltage, Phase, Hertz	208/230, 1, 60
Minimum Circuit Amps (MCA)	A	1
Maximum Overcurrent Protection (MOP)	A	15
<b>Fan</b>		
Type x Quantity		Cross-flow x 1
Air Flow Volume (H/M/L)	CFM	706/500/383
Fan Motor Running Current	A	0.31
Fan Motor Power Input	W	65
<b>Refrigerant Piping</b>		
Connection Pipe	Gas (inch)	5/8
	Liquid (inch)	3/8
Connection Method		Flare Connection
Refrigerant		R410A
<b>Dimension/Weight</b>		
Dimensions (HxWxD)	inch	42-7/16 x 12-13/16 x 9-11/16
Net Weight	lbs	35.5
<b>Other</b>		
Safety Certification		ETL

# Outline and Physical Dimensions of GMV-ND24G/B4B-T(U).

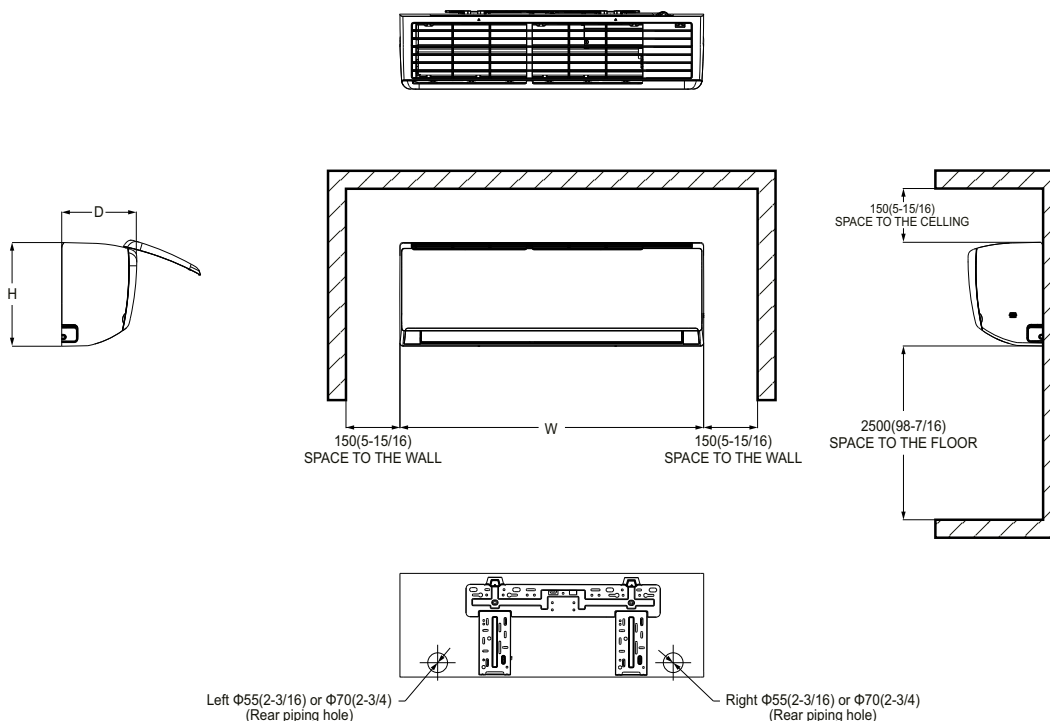

Unit:mm(in.)

