

**Submittal Data:**

**7,000 to 12,000 BTU/H 115V, 208/230V Cooling Only, Cooling w/ Electric Heating & Heat Pump Models**

Job Name \_\_\_\_\_ Location \_\_\_\_\_ Date: \_\_\_\_\_

Purchaser \_\_\_\_\_ Engineer \_\_\_\_\_

Submitted To \_\_\_\_\_ For  Reference  Approval  Construction

Unit Designation \_\_\_\_\_ Schedule No. \_\_\_\_\_

**GENERAL FEATURES**

- Industry Standard Size (26" x 15 5/8"),
- Designed to easily install in most standard wall sleeve
- Fits GE AJ Series, Sanyo STB Series, Amana PB Series, etc (Contractor must verify)

- Electronic Touch Pad
- IR Remote Control
- LCDI Power Cord
- Condensate Slinger Ring Disposal
- 5 Year Limited Warranty



Model Number	Capacity (BTU/H)			EER	COP	Dehumidification (Pints/Hr)	Indoor Fan CFM (Hi/Med/Low)
	Cooling	Heating					
		Rev. Cycle	Electric				
<b>Cooling Only Models</b>							
26TTW09AC115V1A	9,300	-	-	9.8	-	2.32	282/258/235
26TTW12AC115V1A	11,800	-	-	9.8	-	3.49	282/258/235
26TTW09AC230V1A	9,100/9,300	-	-	9.8/9.8	-	2.32	282/258/235
26TTW12AC230V1A	11,800/12,000	-	-	9.8/9.8	-	3.49	282/258/235
<b>Cooling with Electric Heat Models</b>							
26TTW09HC230V1A	9,100/9,300	-	9,000/11,000	9.8/9.8	-	2.32	270/247/223
26TTW12HC230V1A	11,800/12,000	-	9,000/11,000	9.8/9.8	-	3.49	270/247/223
<b>Heat Pump Models</b>							
26TTW09HP115V1A	9000	8,500	3,900	9.8	3	2.32	270/247/223
26TTW07HP230V1A	7,200/7,400	6,600/6,800	9,000/11,000	10.6/10.6	3.1/3.1	1.37	270/247/223
26TTW09HP230V1A	9,100/9,300	8,600/8,800	9,000/11,000	9.7/9.7	3.0/3.0	2.32	270/247/223
26TTW12HP230V1A	11,500/11,700	11,200/11,400	9,000/11,000	9.6/9.6	2.9/2.9	3.49	270/247/223

**Electrical Specification**

Model Number	Voltage	Input Power (Watts)			Current (Amps)		Max Fuse Size	Receptacle Configuration
		Cooling	Elec. Heating	Rev. Cycle	Cooling	Heating		
<b>Cooling Only Models</b>								
26TTW09AC115V1A	115V	950	-	-	8.7	-	15	NEMA 5-15P
26TTW12AC115V1A	115V	1200	-	-	11	-	15	NEMA 5-15P
26TTW09AC230V1A	208/230V	930/950	-	-	4.7/4.3	-	15	NEMA 6-15P
26TTW12AC230V1A	208/230V	1200/1220	-	-	6.1/5.7	-	15	NEMA 6-15P
<b>Cooling with Electric Heat Models</b>								
26TTW09HC230V1A	208/230V	930/950	2900/3500	-	4.7/4.3	15.2/14.0	20	NEMA 6-20P
26TTW12HC230V1A	208/230V	1200/1220	2900/3500	-	6.1/5.7	15.5/14.0	20	NEMA 6-20P
<b>Heat Pump Models</b>								
26TTW09HP115V1A	115V	920	1,150	830	8.4	7.6	15	NEMA 5-15P
26TTW07HP230V1A	208/230V	680/700	2900/3500	620/640	3.5/3.2	3.2/2.9	20	NEMA 6-20P
26TTW09HP230V1A	208/230V	940/960	2900/3500	840/860	4.8/4.4	4.3/4.0	20	NEMA 6-20P
26TTW12HP230V1A	208/230V	1200/1220	2900/3500	1140/1160	6.1/5.6	5.9/5.4	20	NEMA 6-20P


## Dimensional Specifications




### Receptacle Configuration

Model Number	Voltage	Electric Heater	Amperage	Receptacle Type
<b>Cooling Only Models</b>				
26TTW09AC115V1A	115V	1150	15	A
26TTW12AC115V1A	115V	1150	15	A
26TTW09AC230V1A	208/230V	2900/3500	15	B
26TTW12AC230V1A	208/230V	2900/3500	15	B
<b>Cooling with Electric Heat Models</b>				
26TTW09HC230V1A	208/230V	2900/3500	20	C
26TTW12HC230V1A	208/230V	2900/3500	20	C
<b>Heat Pump Models</b>				
26TTW09HP115V1A	115V	1150	15	A
26TTW07HP230V1A	208/230V	2900/3500	20	C
26TTW09HP230V1A	208/230V	2900/3500	20	C
26TTW12HP230V1A	208/230V	2900/3500	20	C


### Receptacle Configurations



**A**  
Parallel  
15 Amps, 125 Volts




**B**  
Tandem  
15 Amps, 250 Volts



**C**  
Perpendicular  
20 Amps, 250 Volts

### Accessories

26TTWSLEEVE	Heavy Galvanized Metal Wall Sleeve 26"W x 15-5/8"H x 16-7/8"D - Includes Stamped Aluminum Exterior Grille - Includes Copper Drain Kit
-------------	---

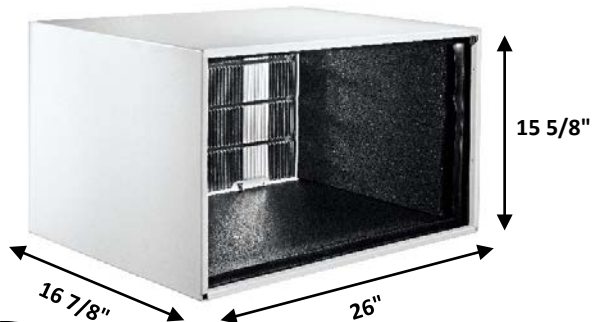

\* All Units Meet or Exceed June 1, 2014 DOE Minimums

Specification are subject to change without notice. Manufacturer reserves right to discontinue or modify specification or design without notice or without incurring obligation. All rights reserved.