



Wired Controller Compatibility Chart



Wired Controller Series	Part Code	Description	Sapphire	All Vireo & Vireo ULTRA	All Vivo	Crown & Crown+	Terra
XE71	MC20700970	Single/Multi zone programmable controller with touch pad & back light. Includes 26 ft. wire harness Part # 4003800101 with Molex plugs.	✓	✓	✓		✓
XK41 (Obsolete) (Replaced by XE71)	GREEMC207059	Single/Multi zone High-Wall programmable controller with touch pad & back light. Includes 26 ft. wire harness Part # 4003800101 with Molex plugs.	✓	✓	✓		✓
XK76	MC20700360	Single/Multi zone programmable controller with touch pad & back light. Includes (1) 26 ft. & (1) 6.5 in. harness Part # 4003800101 & 4001024512 with Molex plugs.	✓	✓	✓		✓

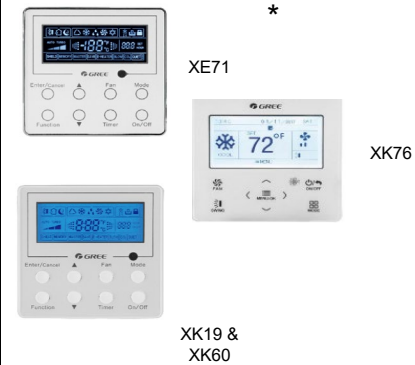

Wired Controller Series	Part Code	Description	Multi Cassette	Multi Slim Duct	Multi Floor/Ceiling	Mini-Console	U-Match Cassette	All U-Match Slim Duct	Floor/Ceiling	U-Match Floor/Ceiling	U-Match Mini-Console
XK19	MC20700140	Used with all Multi Zones - programmable controller with touch buttons. Includes 26 ft. wire harness Part # 40010232 with Molex plugs.	✓	✓	✓						
XE71 ¹	MC20700970	May be used with all Multi Zones: Cassette, Floor-Ceiling, Slim Duct models - programmable controller with touch pad & back light. Includes 26 ft. wire harness Part # 4003800101 with Molex plugs.	✓	✓	✓						
XK41 (Obsolete) (Replaced by XE71)	GREEMC207059	May be used with all Multi Zones-Cassette, Floor-Ceiling, Slim Duct models- programmable controller with touch pad & back light. Includes 26 ft. wire harness Part # 4003800101 with Molex plugs.	✓	✓	✓						
XK76 ²	MC20700360	Single/Multi zone high wall programmable controller with touch pad. Includes (1) 26 ft. & (1) 6.5 in. wire harness Part # 4003800101 & 4001024512 with Molex plugs.	✓	DUCT B ²	✓						
XK60 ³	MC20700550	U-Match & U-Match+ programmable controller with buttons & back light. Requires field supplied 18/2 AWG 300V [min] stranded wire. Max effective wire length is 26 ft.					✓	✓	✓		



Controller Included with Unit

Note: All Wired Controller wire harness is 26 ft., 26 ft. is the maximum length for effective operation. It should not be cut or spliced.

¹ XE71 May be used in lieu of the XK19, but, if used to replace an XK19 already installed the wire harness must also be replaced.

XE 71 has integrated control capability for up to 16 units, requires connection to a Smart Zone Controller.

² XK76 Used with DUCT B models can be used to set external static pressure.

³ XK60 Can be used with UMAT BD hi-static duct models to set external static pressure.

* REPRESENTATIVE IMAGES, ACTUAL PRODUCT MAY VARY, CHECK SALES LITERATURE.

Go to GreeComfort.com <https://www.greecomfort.com/resources/dealer-resources-current-product/>, see **Wired Programmable Controllers** Section for more information.