

SUBMITTAL DATA

FLEXE60HP230V1AH / FLEXE60HP230V1AO
60000 BTU/H Unitary Heat Pump Split System

Job Name

Location

Date

Purchaser

Engineer

Submitted to

For

Unit Designation

Schedule No.



FLEXE60HP230V1AH



FLEXE60HP230V1AO

GENERAL FEATURES


- AHRI Certificate: [211078852](#)
- High Efficiency DC Inverter Technology
- 24VAC Thermostat Compatible
- Zero Lot Line Design
- 8 Speed Fan Motor
- Matched with GREE Indoor Unit
- Designed for New Construction or Replacement Market
- Compact and Quiet, as low as 65 dB(A) Side Discharge Outdoor Unit
- Cooling and Heating down to -15°C (5°F)
- Coil (Outdoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Gold Colored Fin - 1500Hr Salt Spray Rating)
- Coil (Indoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Blue Colored Fin - 500Hr Salt Spray Rating)

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SPECIFICATIONS		FLEXE60HP230V1AH / FLEXE60HP230V1AO		FEATURES & FUNCTIONS SUMMARY		FLEXE60HP230V1AH / FLEXE60HP230V1AO	
System Type		HEAT PUMP					
SYSTEM PERFORMANCE							
Cooling	Min - Max	Btu/h	38250 - 57000				
	Capacity @95°F	Btu/h	54000				
Heating	Min - Max	Btu/h	26750 - 59000				
	Capacity @5°F	Btu/h	31400				
	Capacity @17°F	Btu/h	30000				
	Capacity @47°F	Btu/h	54000				
SEER2		15.2					
EER2		10					
HSPF2		7.8					
COP @5°F		1.8					
COP @47°F		2.9					
Cooling Temperature Range		°F	5 - 118				
Heating Temperature Range		°F	5 - 75				
Refrigerant Type		R410A					
INDOOR UNIT				FLEXE60HP230V1AH			
Power Supply		VAC	208-230V / 1Ph / 60 Hz				
Sound Pressure Level		dB(A)	54				
Control Voltage		VAC	24				
Rated Current Cooling		A	5				
Rated Current Heating		A	5				
MCA		A	7.5				
MOCP		A	15				
Electric Heater (Optional)		kW	5, 8, 10, 15, 20				
Air Flow		CFM	1500				
External Static Pressure (Up to)		In W.c.	1.0				
Dehumidification		pt/hr	12.13				
External Dimensions (W x H x D)		in	24-3/4 x 52 x 21-1/4				
Package Dimension (W x H x D)		in	27-5/16 x 54-1/4 x 26				
Net Weight		lbs	189.6				
Gross Weight		lbs	203.9				
OUTDOOR UNIT				FLEXE60HP230V1AO			
Power Supply		VAC	208-230V / 1Ph / 60 Hz				
Sound Pressure Level		dB(A)	65				
Control Voltage		VAC	24				
Rated Current Cooling		A	32				
Rated Current Heating		A	32				
MCA		A	32				
MOCP		A	45				
External Dimensions (W x H x D)		in	39 x 37-3/4 x 14-5/8				
Package Dimension (W x H x D)		in	45-7/16 x 43-3/4 x 18-7/8				
Net Weight		lbs	200.6				
Gross Weight		lbs	223.8				
Refrigerant Charge - R410A		oz	197.5				
Additional Charge		oz/ft	0.32				
REFRIGERANT PIPING							
Line Set Size (Liquid - Gas) - Flared Connections		in	3/8 - 3/4				
Pre-Charge Length		ft	31				
Pipe Length (Min - Max)		ft	10 - 164				
Max. Pipe Elevation		ft	98.4				
SYSTEM FEATURES							
Compressor		Inverter					
Ultra Low Frequency Torque Control		Yes					
Power Factor Correction		Yes					
Compressor Type		Rotary					
Refrigerant Type		R410A					
Outdoor Electronic Expansion Valve (EEV)		Yes					
Indoor TXV Control		Yes					
Basepan With Electric Heater		Yes					
Compressor With Electric Heater		Yes					
Fin Coating (Outdoor - Golden & Indoor - Blue)		Acrylic Resin					
Intelligent Defrosting		Yes					
Intelligent Preheating		Yes					
Low Voltage Startup		Yes					
Memory/Power Failure Recovery		Yes					
Self Diagnosis		Yes					
Low Ambient Cooling		No					
24VAC Thermostat Compatible		Yes					
Indoor Fan Type		Centrifugal					
Multi Fan Speeds		8					
Auxiliary Electrical Heater		Optional					

FAN PERFORMANCE

Static Pressure (Inches W.C.)	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
Speed 1 (CFM)	1660	1540	1470									
Speed 2 (CFM)	1850	1720	1650	1600								
Speed 3 (CFM)	1920	1800	1730	1650	1480							
Speed 4 (CFM)	2110	2000	1950	1860	1760	1640	1500					
Speed 5 (CFM)	2250	2200	2190	2140	2040	1930	1800	1670	1520			
Speed 6 (CFM)	2260	2220	2200	2170	2090	2010	1910	1760	1650	1550		
Speed 7 (CFM)	2300	2260	2230	2200	2150	2115	2050	1990	1920	1790	1650	1470
Speed 8 (CFM)	2320	2280	2250	2230	2190	2140	2080	2040	2000	1950	1920	1890

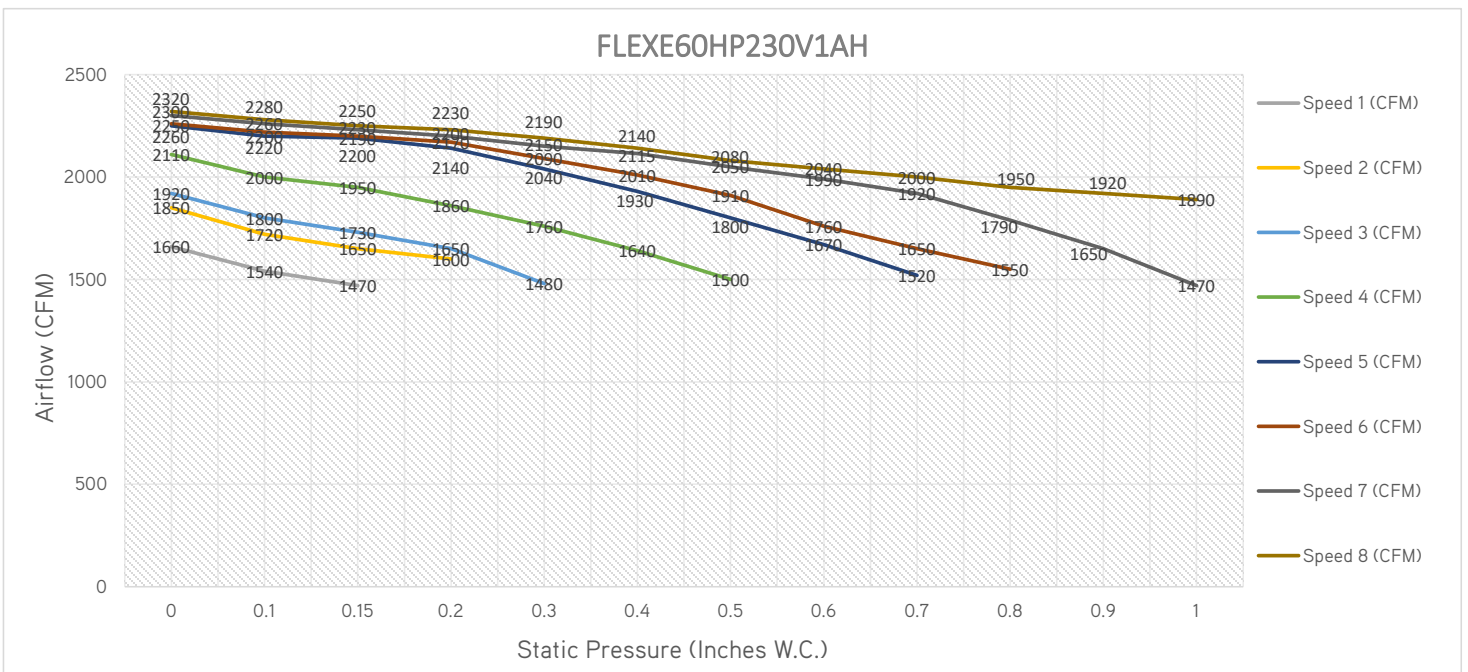

NOTE:

1. Above chart CFM ratings are based on dry coil with factory filter installed.
2. For wet coil CFM ratings, multiply the CFM by 0.96 correction factor.

DIMENSIONS


INDOOR UNIT

Unit: inch

FLEXE60HP230V1AH	
DIMENSIONS	
A	11-5/8"
B	9-1/2"
H	52"
W	24-3/4"
D	21-1/4"

FILTER SIZE	
Supplied*	20-3/4" x 20-3/8" x 5/8"
Suggested	20-3/4" x 20-3/8" x 1"


*Supplied filter is metal mesh

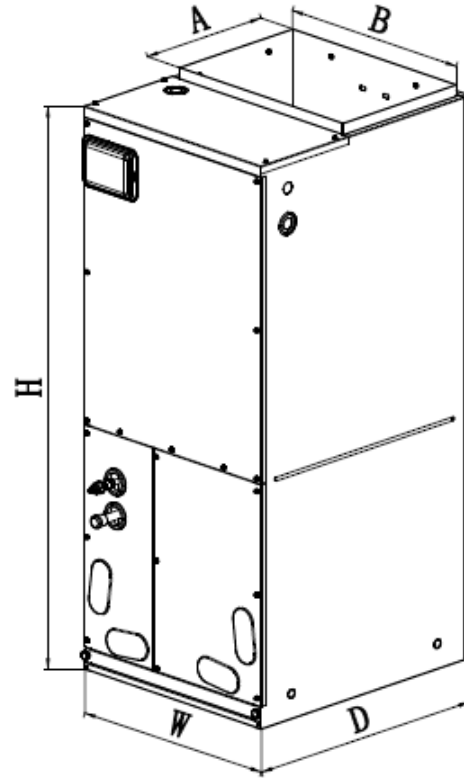


OUTDOOR UNIT

Unit: inch

FLEXE60HP230V1AO	
DIMENSIONS	
A	39"
B	15-13/16"
C	37-3/4"
D	22-7/16"
E	14-9/16"
F	38-1/4"
G	14-5/8"

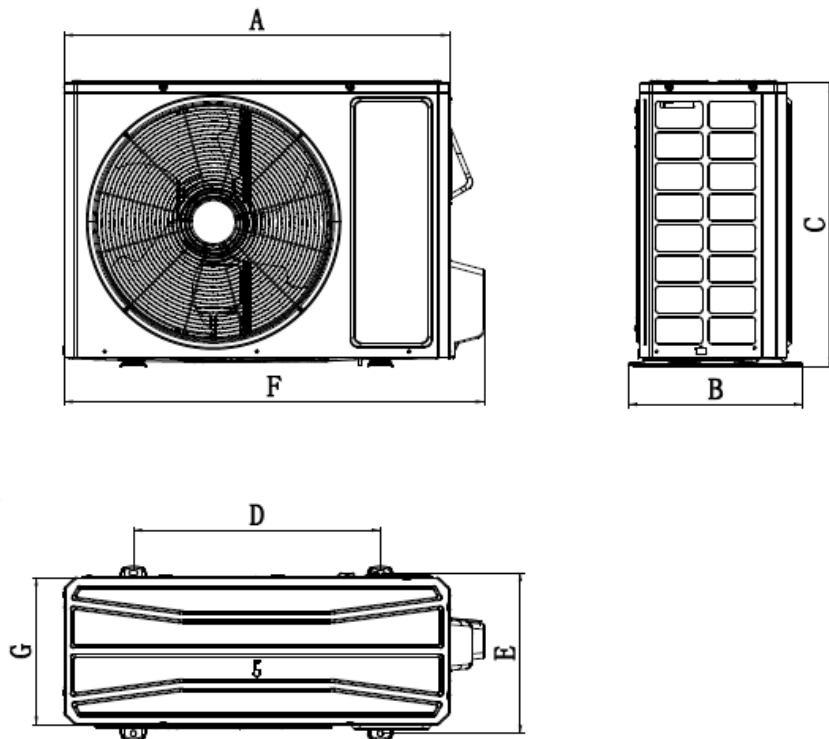

ACCESSORY HEATER AND GENERAL INFORMATION

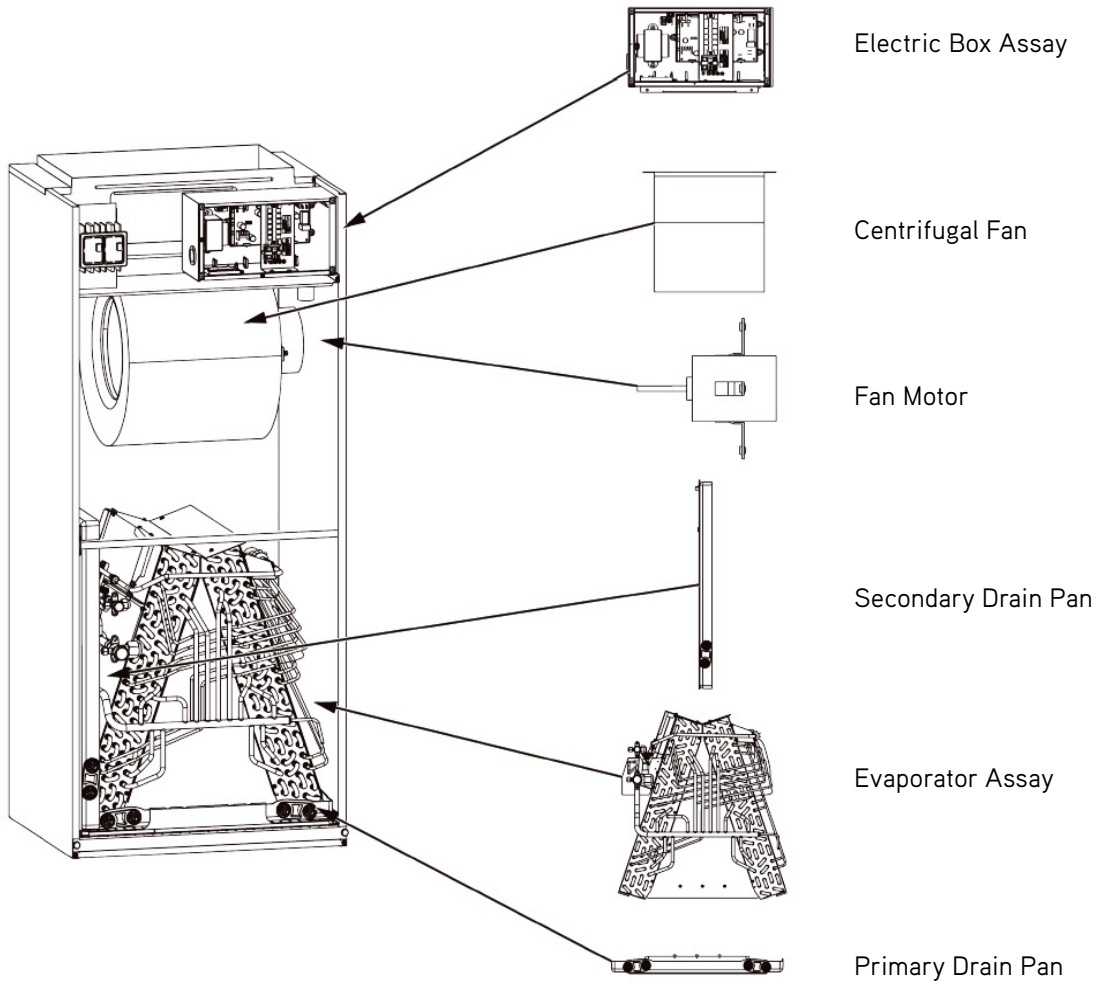



Model	Heat Kit Model	Electric Heat (kW)		Min. Circuit Ampacity (A)		Max Fuse or Breaker (A)							
		208V	230V	208V	230V	208V	230V						
FLEXE60HP230V1AH	One Mains Supply												
	ECOHTR05KW	3.74	4.6	31	33	35	35						
	ECOHTR08KW	6.03	7.36	44	48	45	50						
	ECOHTR10KW	7.49	9.2	53	58	60	60						
	Two Mains Supply												
		Power A	Power B	Power A	Power B	Power A	Power B	Power A	Power B	Power A	Power B	Power A	Power B
	ECOHTR15KW	7.49	3.74	9.2	4.6	53	23	58	25	60	25	60	30
ECOHTR20KW	7.49	7.49	9.2	9.2	53	46	58	50	60	50	60	60	

CLEARANCES


INDOOR UNIT

Minimum clearance

FRONT > 24

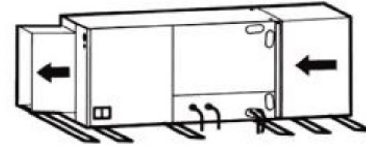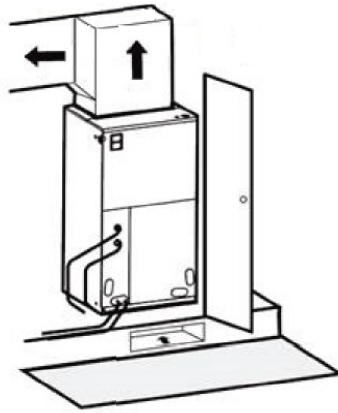

Horizontal Left Configuration - No Modification Needed

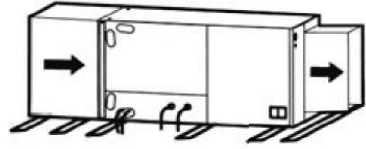

Horizontal Right Configuration - Must Relocate Drain Pan

NOTE:

Allow a minimum of 24" in front of the unit for service clearance. When installing in an area directly over a finished ceiling (such as an attic), an emergency drain pan is required directly under the unit. **See local and state codes for requirements.** When installing this unit in an area that may become wet, elevate the unit with a sturdy, non-porous material. In installations that may lead to physical damage (i.e. a garage) it is advised to install a protective barrier to prevent such damage. This air handler is designed for a complete supply and return ductwork system.

OUTDOOR UNIT


Minimum clearance

NOTE:

Install the Outdoor Unit **2 Inches** Above the Expected Snow Line

1. When one outdoor unit is to be installed.


A - E	H_b H_d H		(in)				
			a	b	c	d	e
B	-	-	-	≥ 4	-	-	-
A, B, C	-	-	≥ 12	≥ 4	≥ 4	-	-
B, E	-	-	-	≥ 4	-	-	≥ 40
A, B, C, E	-	-	≥ 12	≥ 6	≥ 6	-	≥ 40
D	-	-	-	-	-	≥ 40	-
D, E	-	-	-	-	-	≥ 40	≥ 40
B, D	$H_b < H_d$	$H_d < H$	-	≥ 4	-	≥ 40	-
	$H_b > H_d$	$H_d > H$	-	≥ 4	-	≥ 40	-
B, D, E	-	$H_b \leq 1/2H$	-	≥ 10	-	≥ 80	≥ 40
	$H_b < H_d$	$1/2H < H_b \leq H$	-	≥ 10	-	≥ 80	≥ 40
	-	$H_b > H$	Prohibited				
	$H_b > H_d$	$H_b \leq 1/2H$	-	≥ 4	-	≥ 80	≥ 40
	$H_b > H_d$	$1/2H < H_b \leq H$	-	≥ 8	-	≥ 80	≥ 40
-	$H_b > H$	Prohibited					

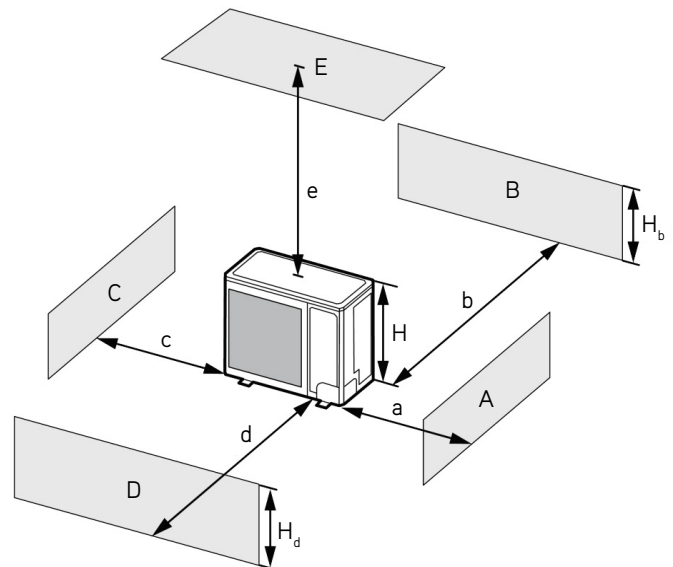

CLEARANCES


2. When two or more outdoor units are to be installed side by side.

A - E	H_b H_d H	(in)				
		a	b	c	d	e
A, B, C	-	≥ 12	≥ 12	≥ 40	-	-
A, B, C, E	-	≥ 12	≥ 12	≥ 40	-	≥ 40
D	-	-	-	-	≥ 80	-
D, E	-	-	-	-	≥ 80	≥ 40
B, D	$H_b < H_d$	$H_d > H$	-	≥ 12	-	≥ 80
	$H_b > H_d$	$H_d \leq 1/2H$	-	≥ 10	-	≥ 80
B, D, E	$H_b > H_d$	$1/2H < H_b \leq H$	-	≥ 12	-	≥ 100
		$H_b \leq 1/2H$	-	≥ 12	-	≥ 80
	$H_b < H_d$	$1/2H < H_b \leq H$	-	≥ 12	-	≥ 100
		$H_b > H$	Prohibited			
	$H_b > H_d$	$H_d \leq 1/2H$	-	≥ 10	-	≥ 100
		$1/2H < H_b \leq H$	-	≥ 12	-	≥ 100
	$H_d > H$	Prohibited				

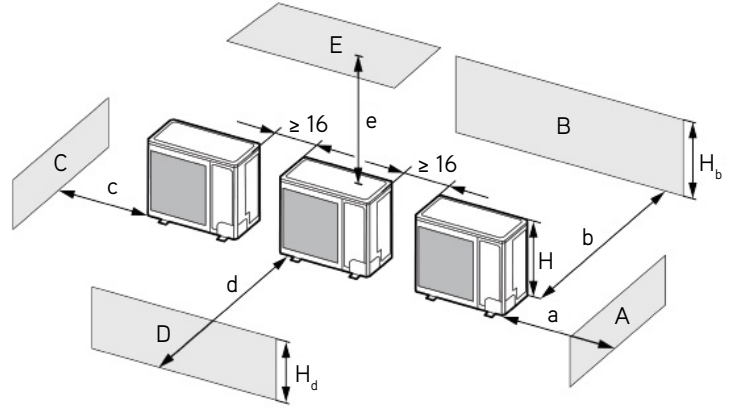


3. When outdoor units are installed in rows.

H_b H_d	(in)
$H_b \leq 1/2H$	$b \leq 10$
$1/2H < H_b \leq H$	$b \leq 12$
$H_b > H_d$	Prohibited

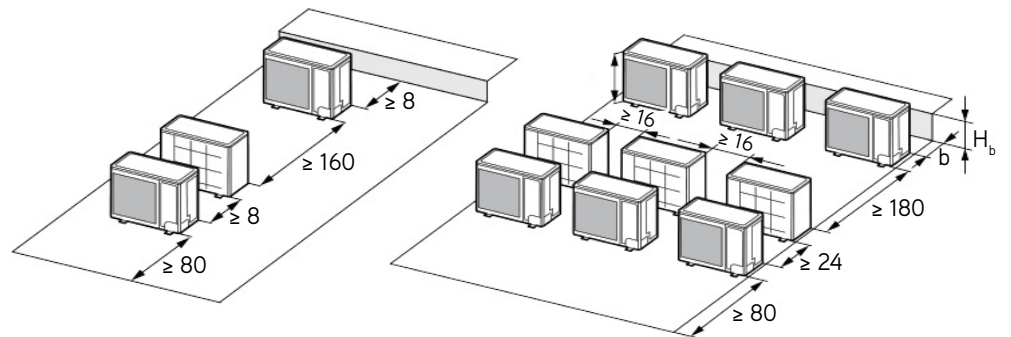

4. When outdoor units are installed one above another.

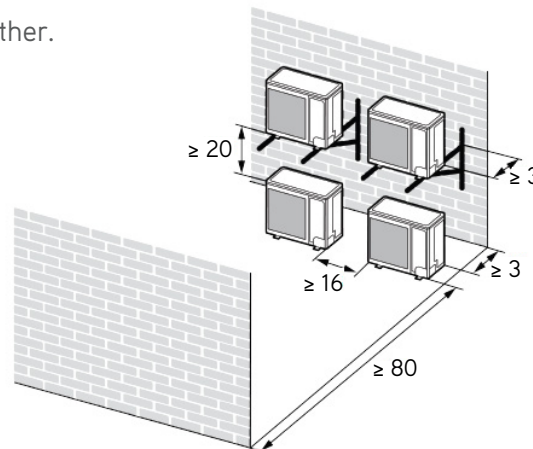

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.