




THE EFFICIENCY IS BUILT RIGHT IN

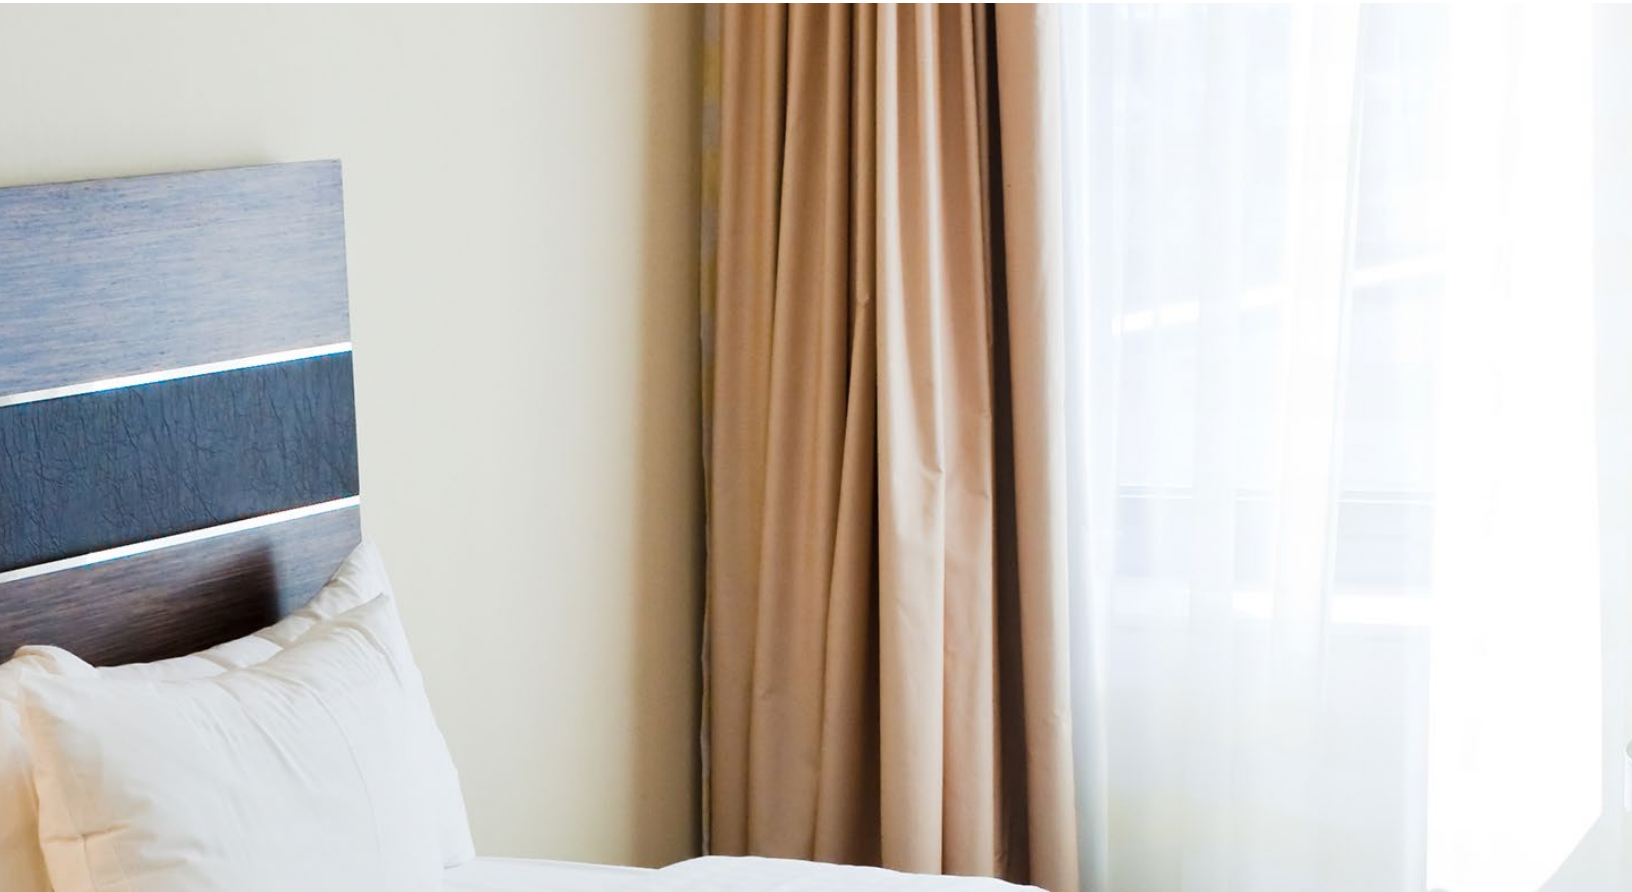

- PROGRAMMABLE FAN
- LED DISPLAY SETTINGS
- MULTIPLE FAN SPEEDS
- RUGGED CONSTRUCTION
- SIMPLE OPERATION

THROUGH-THE-WALL COMFORT.

GREE's Through-The-Wall unit delivers all-season comfort and efficiency with a rugged construction that's built to last. Operation and maintenance are a breeze with a simple, digital touchpad and LED display. Programmable operation with setpoint limits and a 3-speed fan let users make easy adjustments every time.

- Electronic setpoint limits
- Multiple fan speeds
- Automatic voltage adaption
- Dual motor technology
- Aero-quiet indoor blower wheel
- Directional airflow control
- Digital thermostat touch-pad control panel
- LED display settings
- Washable, polymeric air filters
- Wireless remote controller



MODEL		26TTW09AC115A-T	26TTW12AC115A-T	26TTW09AC230A-T	26TTW12AC230A-T
System Type		COOLING ONLY			
Cooling Capacity	Btu/h	9300	11800	9300	12000
Energy Efficiency Rating	EER	9.8	9.8	9.8	9.8
Cooling Temperature Range	°F	64 - 109			
Air flow (Min-Max)	CFM	235 - 283	235 - 283	235 - 283	235 - 283
Dehumidification	pt/hr	2.32	3.49	2.32	3.49
Unit Dimension (WxHxD)	in	26 x 15 5/8 x 21 3/16			
Weight (Net / Gross)	lbs	74 / 87	80 / 93	71 / 84	79 / 92
Refrigerant Type / Coil Type		R410A / Aluminum Fin-Copper Tube			

POWER SUPPLY		115V / 1Ph / 60Hz		208-230V / 1Ph / 60Hz	
Current Cooling	amps	8.7	11.0	4.3	5.7
Power Cord Length	in	96	96	72	72
Plug Configuration NEMA Number		NEMA5-15P	NEMA5-15P	NEMA6-15P	NEMA6-15P

MODEL		26TTW09HC230A-T	26TTW12HC230A-T
System Type		COOLING W/ ELECTRIC HEATING	
Cooling Capacity	Btu/h	9300	12000
Heating Capacity (Electric)	KW	3.5	3.5
Energy Efficiency Rating	EER	9.8	9.8
Cooling Temperature Range	°F	64 - 109	
Air flow (Min-Max)	CFM	224 - 271	224 - 271
Dehumidification	pt/hr	2.32	3.49
Unit Dimension (WxHxD)	in	26 x 15 5/8 x 21 3/16	
Weight (Net / Gross)	lbs	74 / 87	81 / 94
Refrigerant Type / Coil Type		R410A / Aluminum Fin-Copper Tube	

POWER SUPPLY		208-230V / 1Ph / 60Hz	
Current Cooling	amps	4.3	5.7
Current Heating	amps	6.1	8
Power Cord Length	in	72	72
Plug Configuration NEMA Number		NEMA6-20P	

MODEL		26TTW09HP115A-T	26TTW07HP230A-T	26TTW09HP230A-T	26TTW12HP230A-T
System Type		HEAT PUMP W/ BACKUP ELECTRIC HEATING			
Cooling Capacity	Btu/h	9000	7400	9300	11700
Heating Capacity	Btu/h	8500	6800	8800	11400
Heating Capacity (Electric Backup)	KW			3.5	
Energy Efficiency Rating	EER	9.8	10.6	9.7	9.6
COP		3.0	3.1	3	2.9
Cooling Temperature Range	°F	64 - 109			
Heating Temperature Range	°F	19 - 86			
Air flow (Min-Max)	CFM	224 - 271			
Dehumidification	pt/hr	2.32	1.37	2.32	3.49
Unit Dimension (WxHxD)	in	26 x 15 5/8 x 21 3/16			
Weight (Net / Gross)	lbs	79 / 92	76 / 90	83 / 96	86 / 100
Refrigerant Type / Coil Type		R410A / Aluminum Fin-Copper Tube			

POWER SUPPLY		115V / 1Ph / 60Hz		208-230V / 1Ph / 60Hz	
Current Cooling	amps	8.4	3.2	4.4	5.6
Rated Current Heating (Heat Pump)	amps	7.6	2.9	4	5.4
Rated Current Heating (Electric Backup)	amps	1.25	4	4	4
Power Cord Length	in	96	72	72	72
Plug Configuration NEMA Number		NEMA6-20P			

LIMITED WARRANTY - ALL SYSTEM TYPES

1 Year Parts and Compressor