

Submittal Data: DUCT24HP230V1AD 24,000 BTU/H Ceiling Cassette

Job Name	Location	Date
-----------------	-----------------	-------------

Purchaser	Engineer
------------------	-----------------

Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
---------------------	--

Unit Designation	Schedule No.
-------------------------	---------------------

- GENERAL FEATURES**
- Quiet Operation -Multi-Speed Fan
 - Medium Static Pressure Capability
 - Slim Line Construction 8" high
 - Internal Condensate Drain Pump
 - Flexible Return Air From Bottom Or Rear
 - XK-19 Wired Controllers
 - Wireless Remote Controllers
 - Sentry Condensate Overflow Protection
 - Limited 5 yr. Parts Warranty


System Ratings

Cooling*	
Rated Capacity	23,800 BTU/H
Heating*	
Rated Capacity	27,400 BTU/H
Sound Pressure (Hi/Lo)**	
Cooling	42/34 dbA
Heating	42/34 dbA
Air Flow (min/max)	
Indoor Fan	324/589 CFM
Ext Static Pressure (max/min)	0.040/0.035 inch wg

Units Specification & Data

Wired Controller	XK-19
Condensate Drain Lift (Height)	18-in 457-mm
Drain Size (OD)	1.0-in 26-mm

Electrical Ratings

Fan Motor	
Output Power	124 W
FLA	0.54 A
Power Supply	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
MCA	1.0 A
Interconnecting Cable Wire Size	14-4 AWG


Refrigerant Piping Data

Refrigerant Type	R410A
Gas Pipe Size (OD)	5/8-in
Liquid Pipe Size (OD)	3/8-in
Connection Method	Flared
* Test conditions are based on AHRI 210/240. **Sound Power ratings are per AHRI 270 and AHRI 350	



24,000 BTUH MODEL

Model # DUCT24HP230V1AD 24,000 BTUH 230V

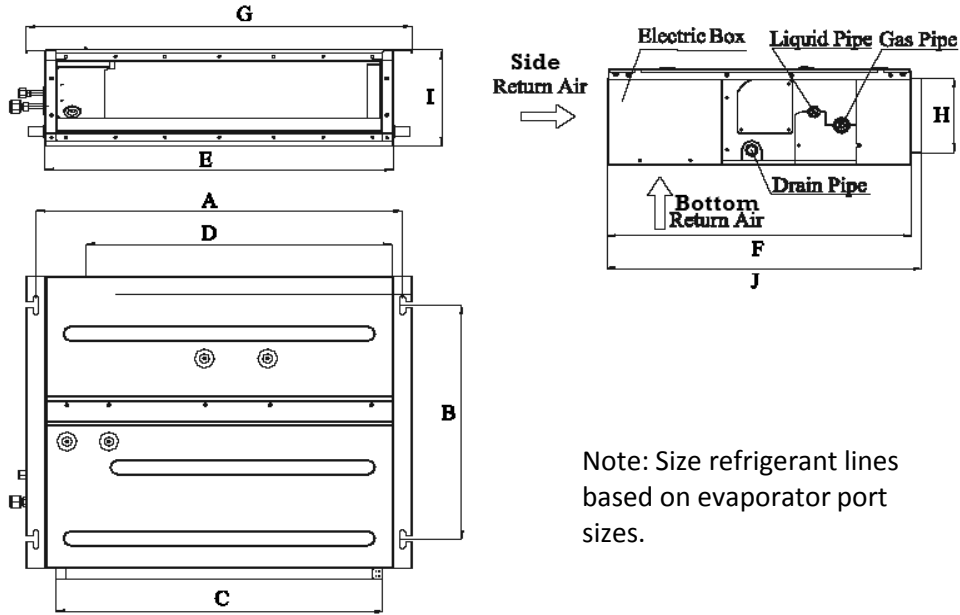

Note: Size refrigerant lines based on evaporator port sizes.


Dimensions

	A	B	C	D	E	F	G	H	I	J
(mm)	1124	491	1062	1020	1100	615	1182	156	200	635
(inches)	44.3	19.3	41.8	40.2	43.3	24.2	46.5	6.1	7.9	25.0

Weight (Net/Gross) 68/90 lbs

INDOOR FAN PERFORMANCE DATA

WG = inches of water guage

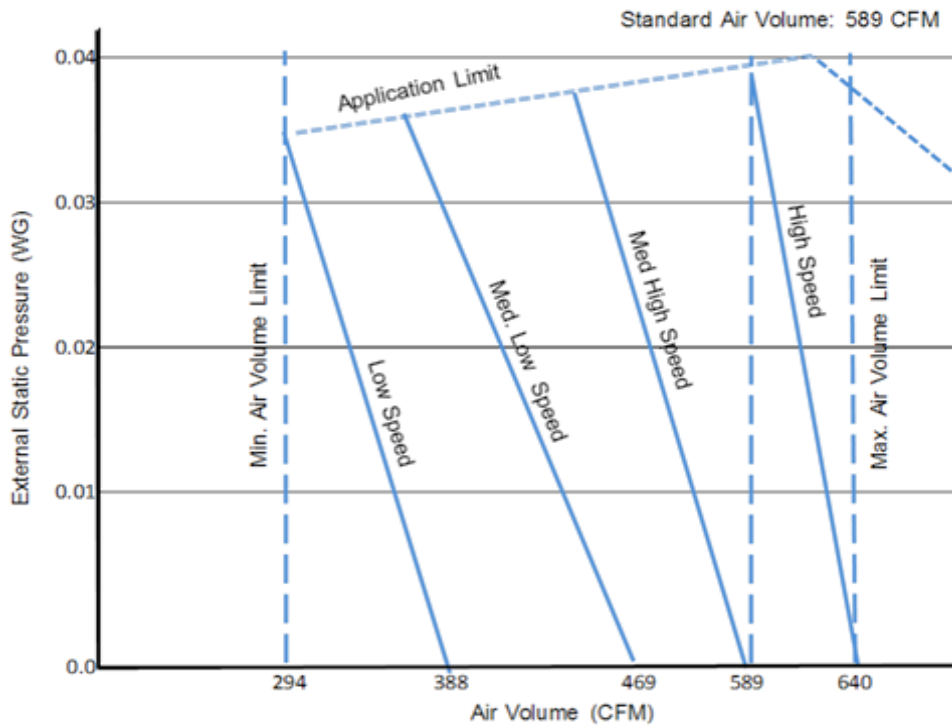

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.