

Submittal Data: XK76

XK76 Command Center for Ductfree Split Systems

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Unit Designation	Schedule No.	

GENERAL FEATURES

- Tactile feedback keypad
- Easy setup and 7 day programming
- Sleek thin design blends into any décor
- Reaches up to 26 feet.
- Convenient LCD display backlighting
- Ready to use cable included.
- No Batteries Required
- 115V or 230V Single Zone Compatible



Compatible with the following Models:

Indoor Models	Model Numbers
Terra	TERRAxxHPxxxV1xH
Vireo	VIRxxHPxxxV1AH
Vireo+	VIRxxHPxxxV1BH
Neo	NEOxxHPxxxV1H
Livo	LIVSxxHPxxxV1AH
Livo+	LIVSxxHPxxxV1BH
Sapphire	SAPxxHPxxxV1AH

XK76 Command Center allows fast & easy access to a large number. The following is a list of typical features and functions support by the X-76 controller:

Note: Some indoor models may not support specific system features or functions.

Always refer to the indoor unit Owner's Manual for a complete list of feature and functions.

On/Off - The On/Off button allows you to start and stop the system.

Operating Mode - Allows users to select an operating mode (i.e. Cooling, Heating, Dry, and Fan Only).

Fan Speed -The indoor fan (i.e. High, Medium, Low & Auto) can be adjusted for peak comfort and quietness.

Room Setpoint – Adjust room setpoint temperature between 61 deg F to 86 deg F (16 ~ 30 range).

Timer Mode - Program a One time period (i.e. 0.5-24 hr.) to which the system will turn ON or OFF.

Daily Schedule - Allows 8 programmable time/temperature segments per day.

Weekly Schedule - Allows 7-day programming with 8 time/temperature segments per day.

Freeze Guard - Room Freeze Guard protection will maintain room temperature above 46° F.

Sleep Mode – Automatically adjust room temperature during your sleep time (i.e. 0.5-24 hr. range).

Turbo Mode – Turbo will force system to run at higher speeds to reach the desired room temperature faster.

X-Fan Mode - Removes moisture build up on coil when the system is turned OFF to prevent mold and mildew.


Privacy Lock - Privacy Lock to prevent unauthorized access to the controls and tampering with system settings.

Service Codes - Automatically display service codes generated by the system.

DIMENSIONAL SPECIFICATIONS


XK76 Command Center for Ductfree Split Systems

Units: inch (mm)

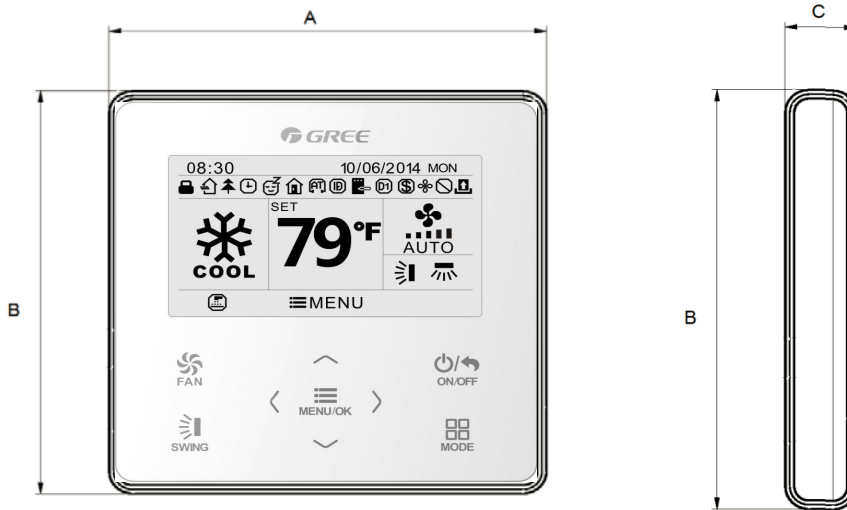

Type	Part Number	A	B	C
XK76	MC20700360	4.375 (111)	4.375 (111)	1.125 (28)

SYSTEM WIRING DIAGRAM

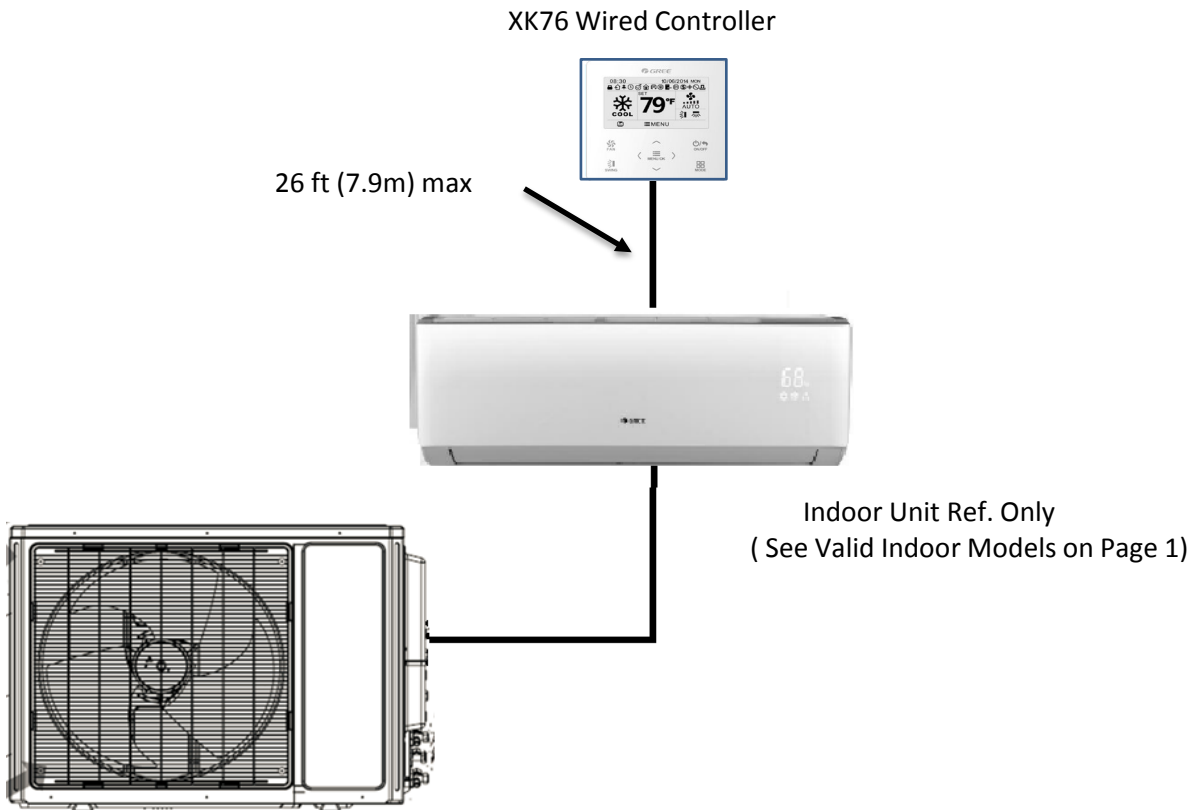

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.