
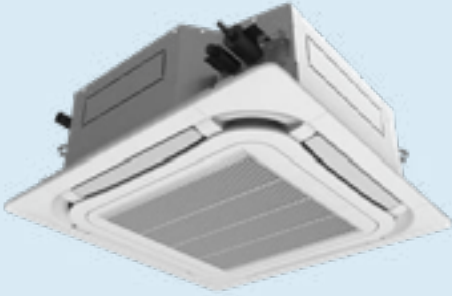


SUBMITTAL DATA

GMV-ND07T/C-T(U) for use with VRF Outdoor Unit
7000 BTU/H One Way Cassette Unit

Job Name	Location	Date
Purchaser	Engineer	
Submitted to	For	
Unit Designation	Schedule No.	
		
YAP1F	GMV-ND07T/C-T(U)	XK46 (Optional)

GENERAL FEATURES

- 360° Air Supply
- Independent Swing Control
- Ultra-low noise operation
- DC Quiet Drainage Pump
- Wireless Remote with LCD Display
- Wired Controller Options
- Based on Outdoor Unit Performance
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SPECIFICATIONS		GMV-ND07T/C-T(U)		FEATURES & FUNCTIONS SUMMARY		GMV-ND07T/C-T(U)			
System Type		HEAT PUMP							
SYSTEM PERFORMANCE									
Cooling	Nominal	Btu/h	7500	Wired Controller Interface		Yes			
	Capacity @95°F	Btu/h		WiFi Included		No			
	Nominal	Btu/h	8500	NEW! Easy Service Access		Yes			
Heating	Capacity @5°F	Btu/h		Indoor Fan Type		Centrifugal			
	Capacity @17°F	Btu/h		Multi Fan Speeds		4 Speeds			
	Capacity @47°F	W		Indoor Unit Display		No			
SEER2				Auxiliary Electrical Heater		No			
EER2				Ventilation (Outdoor Air)		No			
HSPF2				REMOTE CONTROLLER FUNCTIONS					
COP @5°F	System Performance Based on the Connected Outdoor Unit Performance			Auto Mode		Yes			
COP @47°F				Auto Fan		Yes			
Cooling Temperature Range				°F		Auto Swing (Horizontal Auto Swing)		No	
Heating Temperature Range				°F		Auto Swing - 180° (Vertical Auto Swing)		Yes	
Refrigerant Type	R410A			Clock		Yes			
INDOOR UNIT		GMV-ND07T/C-T(U)		Dry Mode		Yes			
Air flow (Min-Max)	CFM	353 - 471		Dry Anti-Mildew (X-Fan) Mode		Yes			
Sound Pressure Level (Min - Max)	dB(A)	28 - 33		Energy Saving Mode		Yes			
Condensate Drain Size (OD)	in	1		Dirty Filter Alert		No			
Dehumidification	pt/hr			Fan Speed Control (7 Speeds)		Yes			
External Dimensions (WxHxD)	in	33-1/8 x 9-1/2 x 33-1/8		I Feel Function		Yes			
Package Dimension (W x H x D)	in	37-7/8 x 12-3/4 x 37-7/8		Privacy Lock		Yes			
Net Weight	lbs	73		Quiet Mode		Yes			
Gross Weight	lbs	86		Room Temperature Display		No			
CASSETTE GRILLE (REQUIRED)		TF06		Sleep Mode		Yes			
Grille Dimension (W x H x D)	in	37-3/8 x 2-1/2 x 37-3/8		3 Sleep Mode Options		Yes			
Package Dimension (W x H x D)	in	40-7/8 x 4-3/8 x 40-5/8		Timer Mode		Yes			
Weight (Net / Gross)	lbs	13 / 21		Turbo Mode		Yes			
REFRIGERANT PIPING				Display On/Off Control		Yes			
Line Set Sized by the Indoor Unit (Liquid - Gas)	in	1/4 - 3/8		Freeze Guard Mode		Yes			
ELECTRICAL				Power Failure Mode		Yes			
Power Supply	208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)								
MCA	A	0.8							
MOCP	A	15							




DIMENSIONS & CLEARANCES

INDOOR UNIT

Unit: inch

GMV-ND07T/C-T(U)

DIMENSIONS

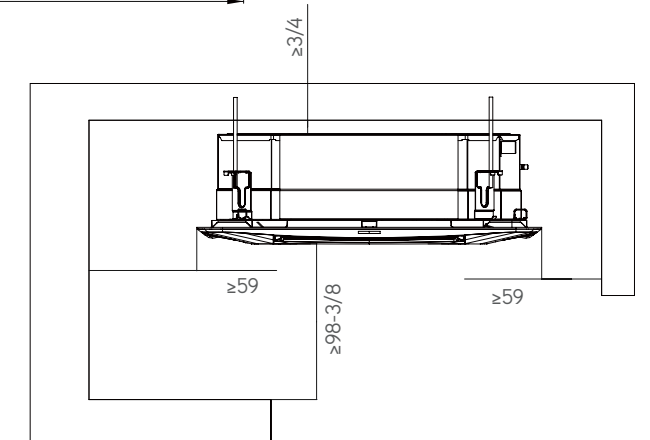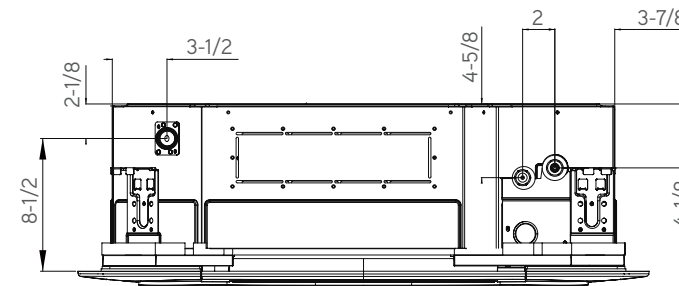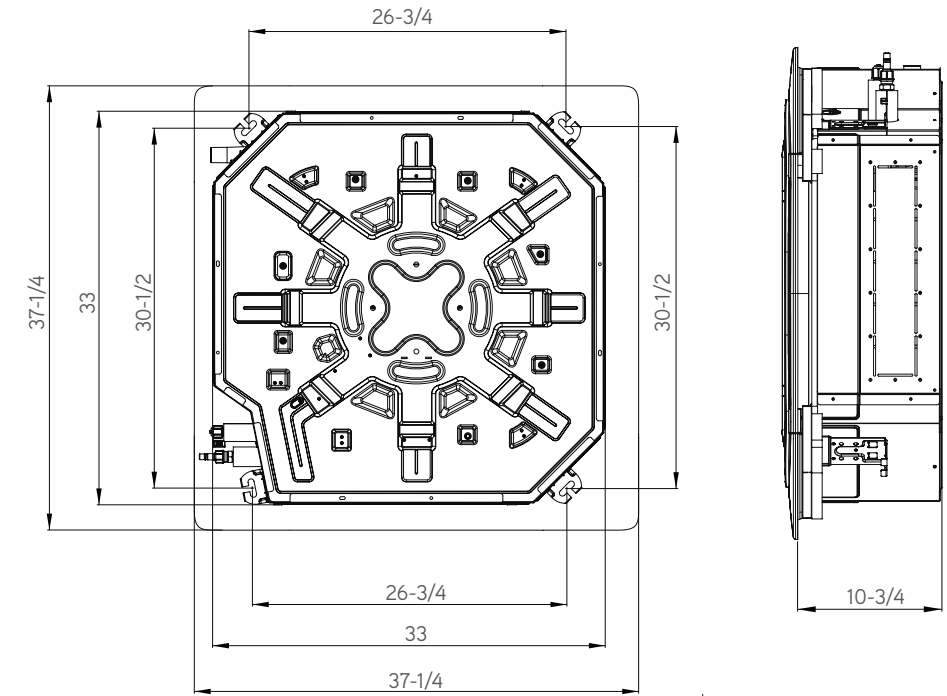

INDOOR UNIT

Minimum clearance

