


Submittal Data: DUCT12HP230V1AD		12,000 BTU/H Ceiling Cassette	
Job Name		Location	Date
Purchaser		Engineer	
Submitted To		For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation		Schedule No.	
GENERAL FEATURES -Quiet Operation -Multi-Speed Fan -Medium Static Pressure Capability -Slim Line Construction 8" high -Internal Condensate Drain Pump -Flexible Return Air From Bottom Or Rear -XK-19 Wired Controllers -Wireless Remote Controllers -Sentry Condensate Overflow Protection -Limited 5 yr. Parts Warranty			
System Ratings		Units Specification & Data	
Cooling* Rated Capacity 11,900 BTU/H		Wired Controller XK-19	
Heating* Rated Capacity 13,100 BTU/H		Condensate Drain Lift (Height) 18-in 457-mm	
Sound Pressure (Hi/Lo)** Cooling 39/32 dbA Heating 39/32 dbA		Drain Size (OD) 1.0-in 26-mm	
Air Flow (min/max) Indoor Fan 177/294 CFM			
Ext Static Pressure (max/min) 0.04/0.03 inch wg			
Electrical Ratings		Refrigerant Piping Data	
Fan Motor Output Power 80 W FLA 0.35 A		Refrigerant Type R410A	
Power Supply Normal Operational Voltage 208/230 V, 1 Phase, 60 Hz Voltage Range 187 - 253 V MCA 1.0 A Interconnecting Cable Wire Size 14-4 AWG		Gas Pipe Size (OD) 3/8-in Liquid Pipe Size (OD) 1/4-in Connection Method Flared	
		* Test conditions are based on AHRI 210/240. **Sound Power ratings are per AHRI 270 and AHRI 350	



12,000 BTUH MODEL

Model # DUCT12HP230V1AD 12,000 BTUH 230V

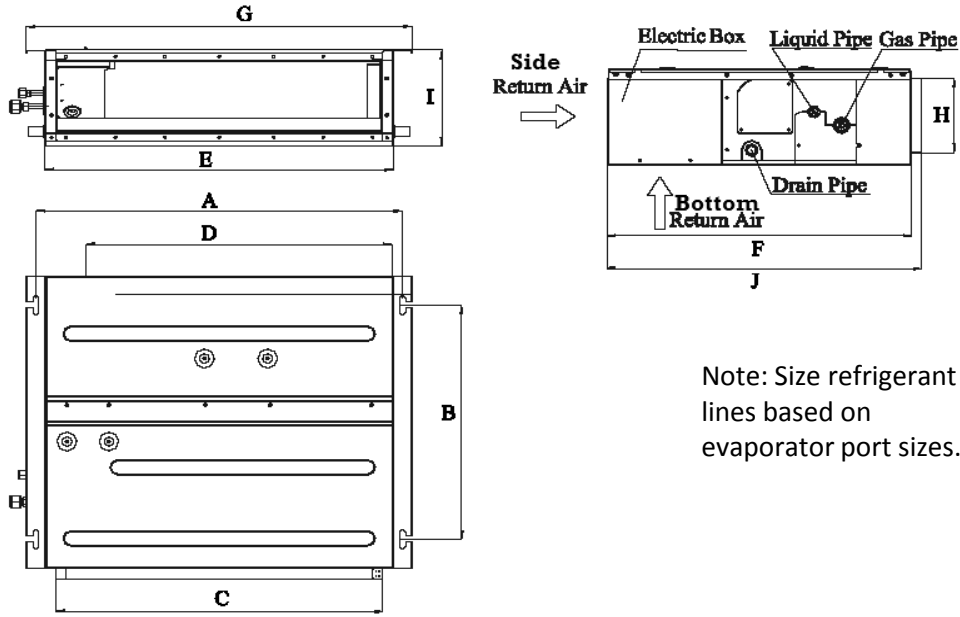

Note: Size refrigerant lines based on evaporator port sizes.


Dimensions

	A	B	C	D	E	F	G	H	I	J
(mm)	742	491	662	620	700	615	782	156	200	635
(inches)	29.2	19.3	26.1	24.4	27.6	24.2	30.8	6.1	7.9	25.0

Weight (Net/Gross) 51/64 lbs

INDOOR FAN PERFORMANCE DATA

WG = inches of water guage

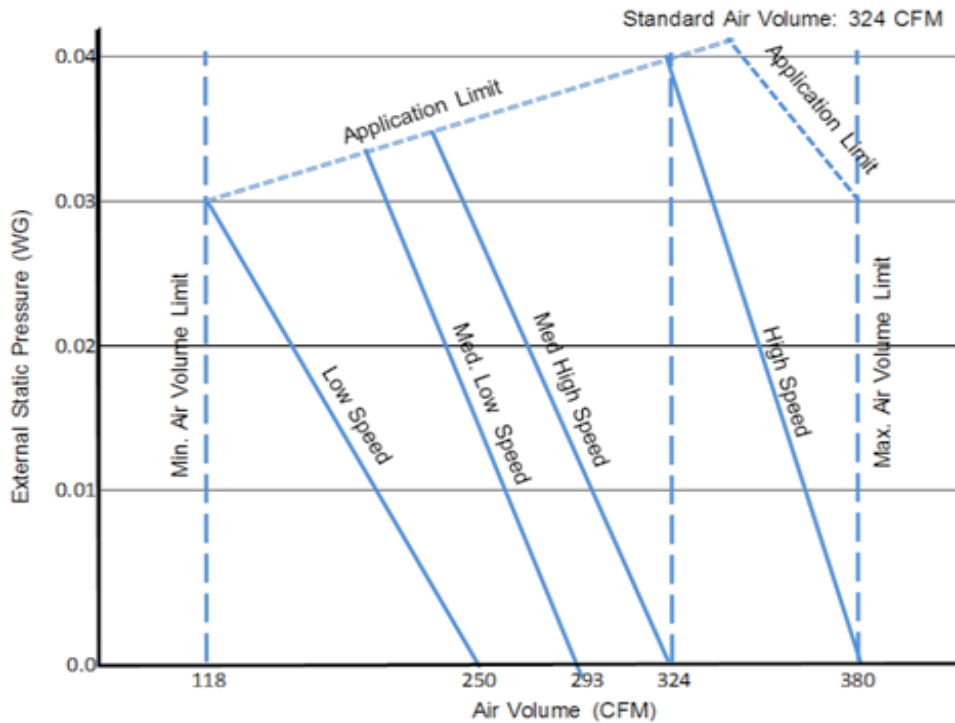

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.